

CEILING TILES
Poly Max

STOP NOISE

ACOUSTICAL
SURFACES INC.

SOUND ABSORPTION MADE EASY!

Poly Max™ Ceiling Tiles

Poly Max polyester acoustical Ceiling Tiles are non-allergenic, non-toxic, fungal-resistant, and do not contain chemical irritants or formaldehyde. Decorative and tackable, apply the acoustically absorbent tiles to ceilings to tame echo and reverberation. Available in a variety of colors or printed with custom graphics to blend into any décor. Material: 100% polyester (60% PET-recycled fiber, 40% PET-virgin fiber)

APPLICATIONS:

Theaters, multipurpose rooms, commercial & office buildings, studios & production houses, pro audio, restaurants & night clubs, government & municipal buildings, hospitals & medical clinics, schools & universities, houses of worship, industrial & manufacturing facilities and much more

SIZES & OPTIONS

Standard Sizes: 23-3/4" x 47-3/4"

Cut To Size/Custom Up to 4' x 8'

Thickness/Density: 1/2" thick/12.5 lb. per cubic foot (pcf);

1" thick/7.5 lb. pcf; 2" thick/5 lb. pcf

COLORS



Red White Orange Lime Blue Purple



Beige Tan Silver Black Gray

Printed Graphics available, call for more information


ACOUSTICAL PERFORMANCE

ASTM C423 E400-Mount

1/2": 0.80 NRC; 1": 0.90 NRC

FLAMMABILITY

Class A Fire-Rated per ASTM E84

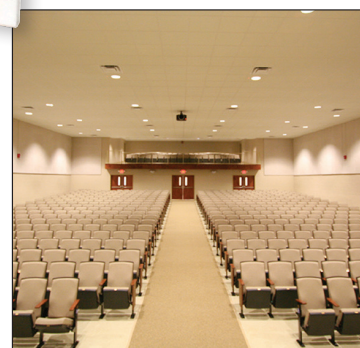

INSTALLATION

Place panels in grid so that the edges sit on the T-grid flanges, with the panel face sitting at the grid plane.



ACOUSTICAL | SURFACES, INC.

Celebrating Over 35 Years - SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION SPECIALISTS

952.448.5300 | 800.448.0121 | sales@acousticalsurfaces.com | www.acousticalsurfaces.com

© 2020 Acoustical Surfaces, Inc. V1