

ACOUSTICALLY
ABSORBENT
Poly Max



ACOUSTICAL
SURFACES INC

SOUND ABSORPTION MADE EASY!

Poly Max™ Direct Attach

Poly Max polyester acoustical Direct Attach panels are non-allergenic, non-toxic, fungal-resistant, and do not contain chemical irritants or formaldehyde. Decorative and tackable, apply the acoustically absorbent panels to ceilings and walls to tame echo and reverberation. Available in a variety of colors or printed with custom graphics to blend into any décor. Material: 100% polyester (60% PET-recycled fiber, 40% PET-virgin fiber)

APPLICATIONS:

Theaters & home theaters, gymnasiums & multipurpose rooms, commercial & office buildings, studios & production houses, pro audio, restaurants & night clubs, government & municipal buildings, hospitals & medical clinics, schools & universities, houses of worship, industrial & manufacturing facilities and much more.

SIZES & OPTIONS

Standard Sizes: 4' x 8'

Cut To Size/Custom Up to 4' x 8'

Thickness/Density: 1/2" thick/12.5 lb. per cubic foot (pcf);

1" thick/7.5 lb. pcf; 2" thick/5 lb. pcf

COLORS



Red White Orange Lime Blue Purple



Beige Tan Silver Black Gray

Printed Graphics available, call for more information

ACOUSTICAL PERFORMANCE



Varies by thickness and mounting method.

1/2": 0.40 - 0.70 NRC; 1": 0.70 - 0.85 NRC

2": 0.90 - 0.95 NRC.

FLAMMABILITY

Class A Fire-Rated per ASTM E84

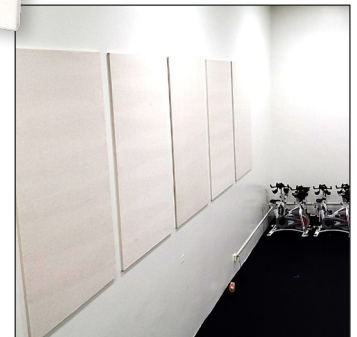

INSTALLATION

To install Poly Max panels using the direct attach method, align the panel to its desired location on the wall or ceiling and screw the panel to the surface using anchors and fasteners appropriate for the mounting surface. Screws are to be placed a minimum of .75" from the edges of the panel. For a finished look, washers may be used with pan head screws.



ACOUSTICAL | SURFACES, INC.

Celebrating Over 35 Years - SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION SPECIALISTS

952.448.5300 | 800.448.0121 | sales@acousticalsurfaces.com | www.acousticalsurfaces.com

© 2020 Acoustical Surfaces, Inc. V1